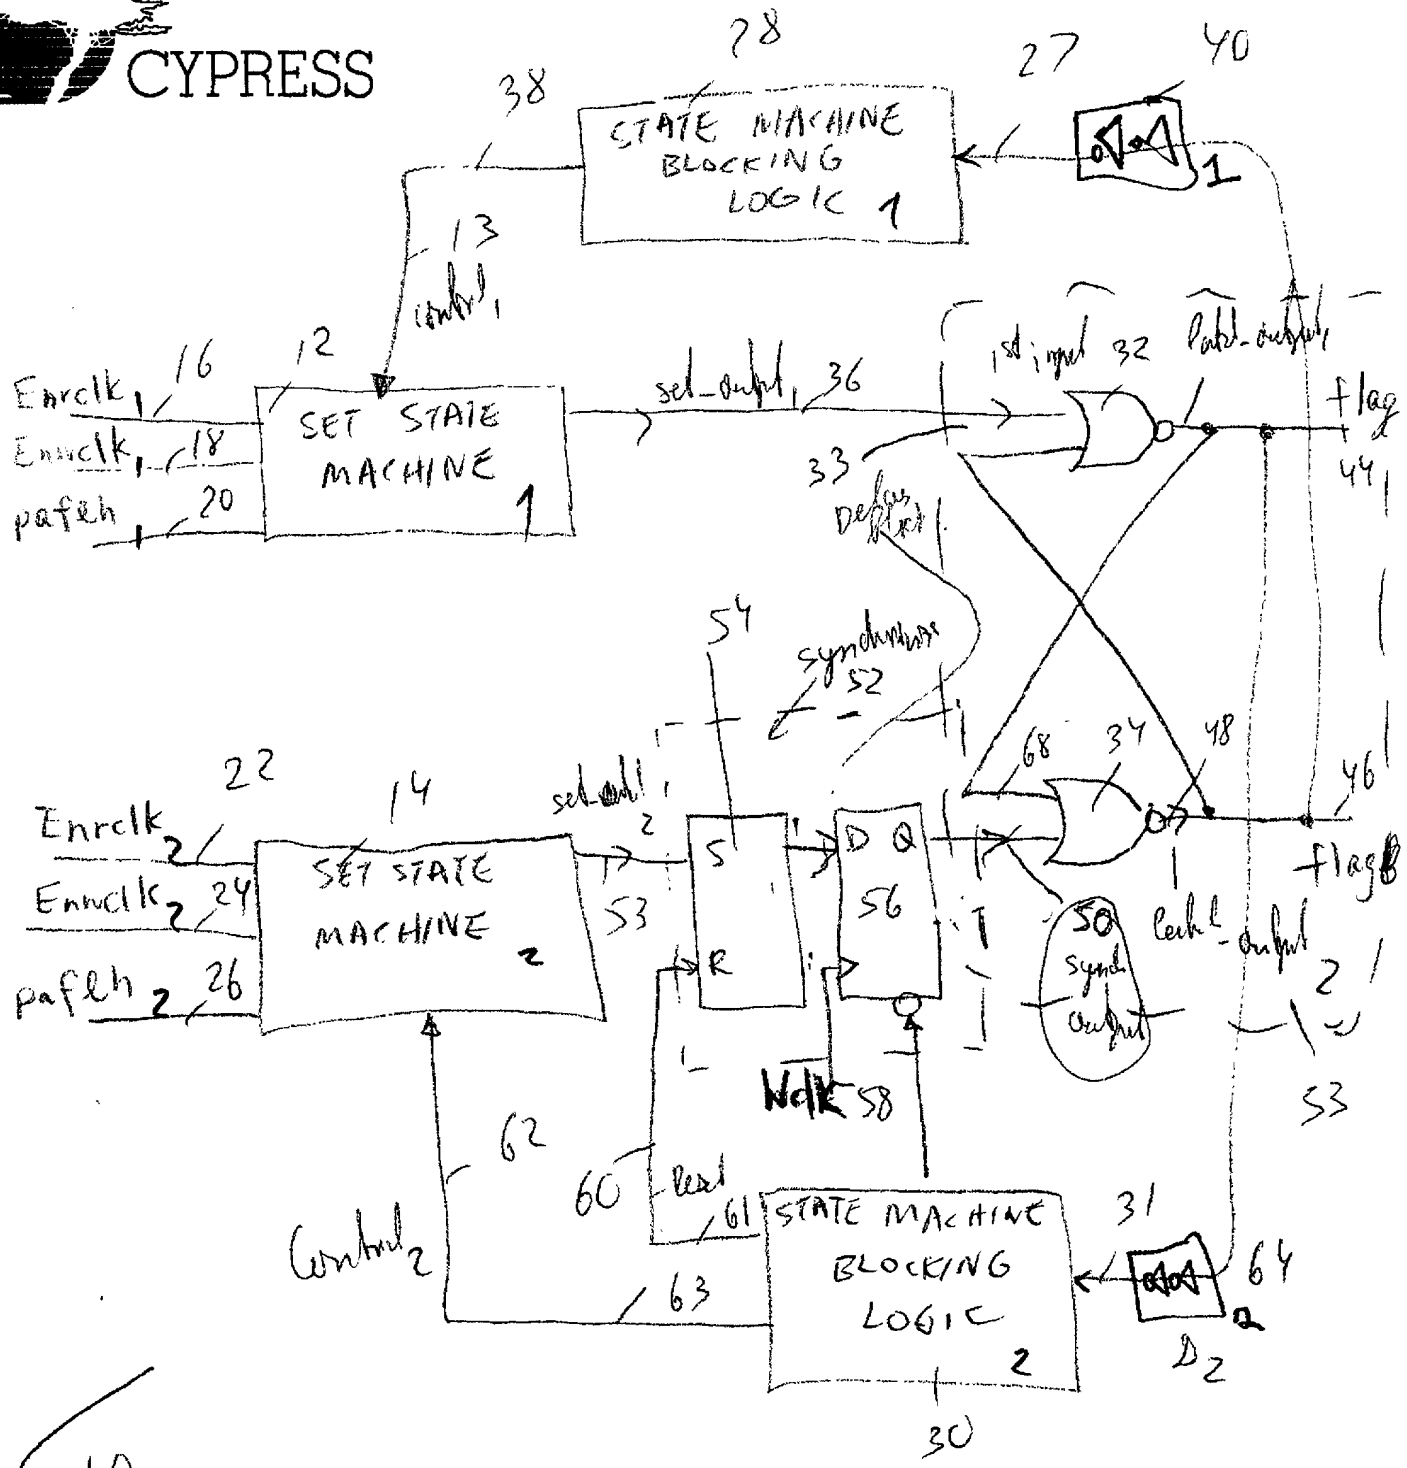

10

PAF → ~~rise and fall~~ Logic changes state only at rising edge of enabled write clock

FIG. 1

CYPRESS

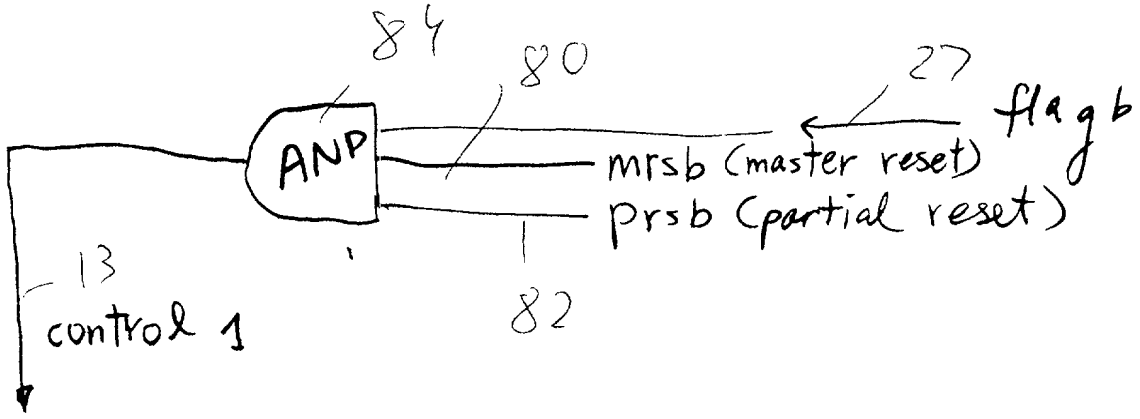

28

FIG. 2A

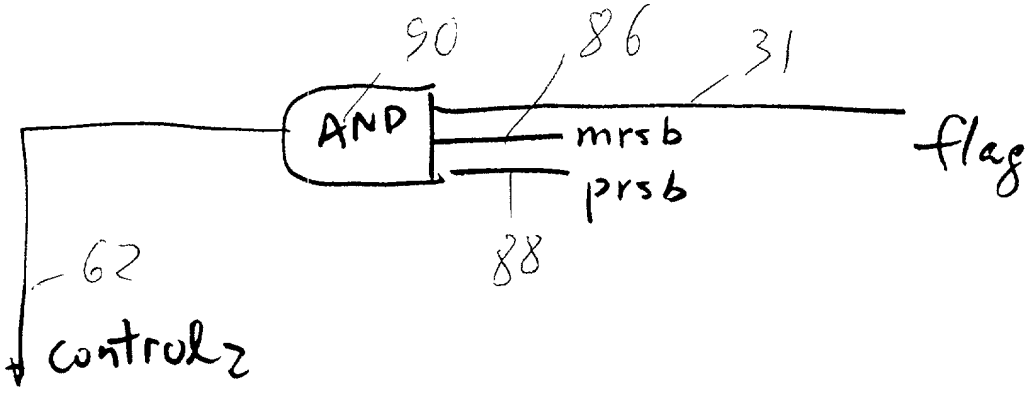

30

FIG. 2B

PAE Blocking Logic

or PAF Blocking Logic

PAF

CYPRESS

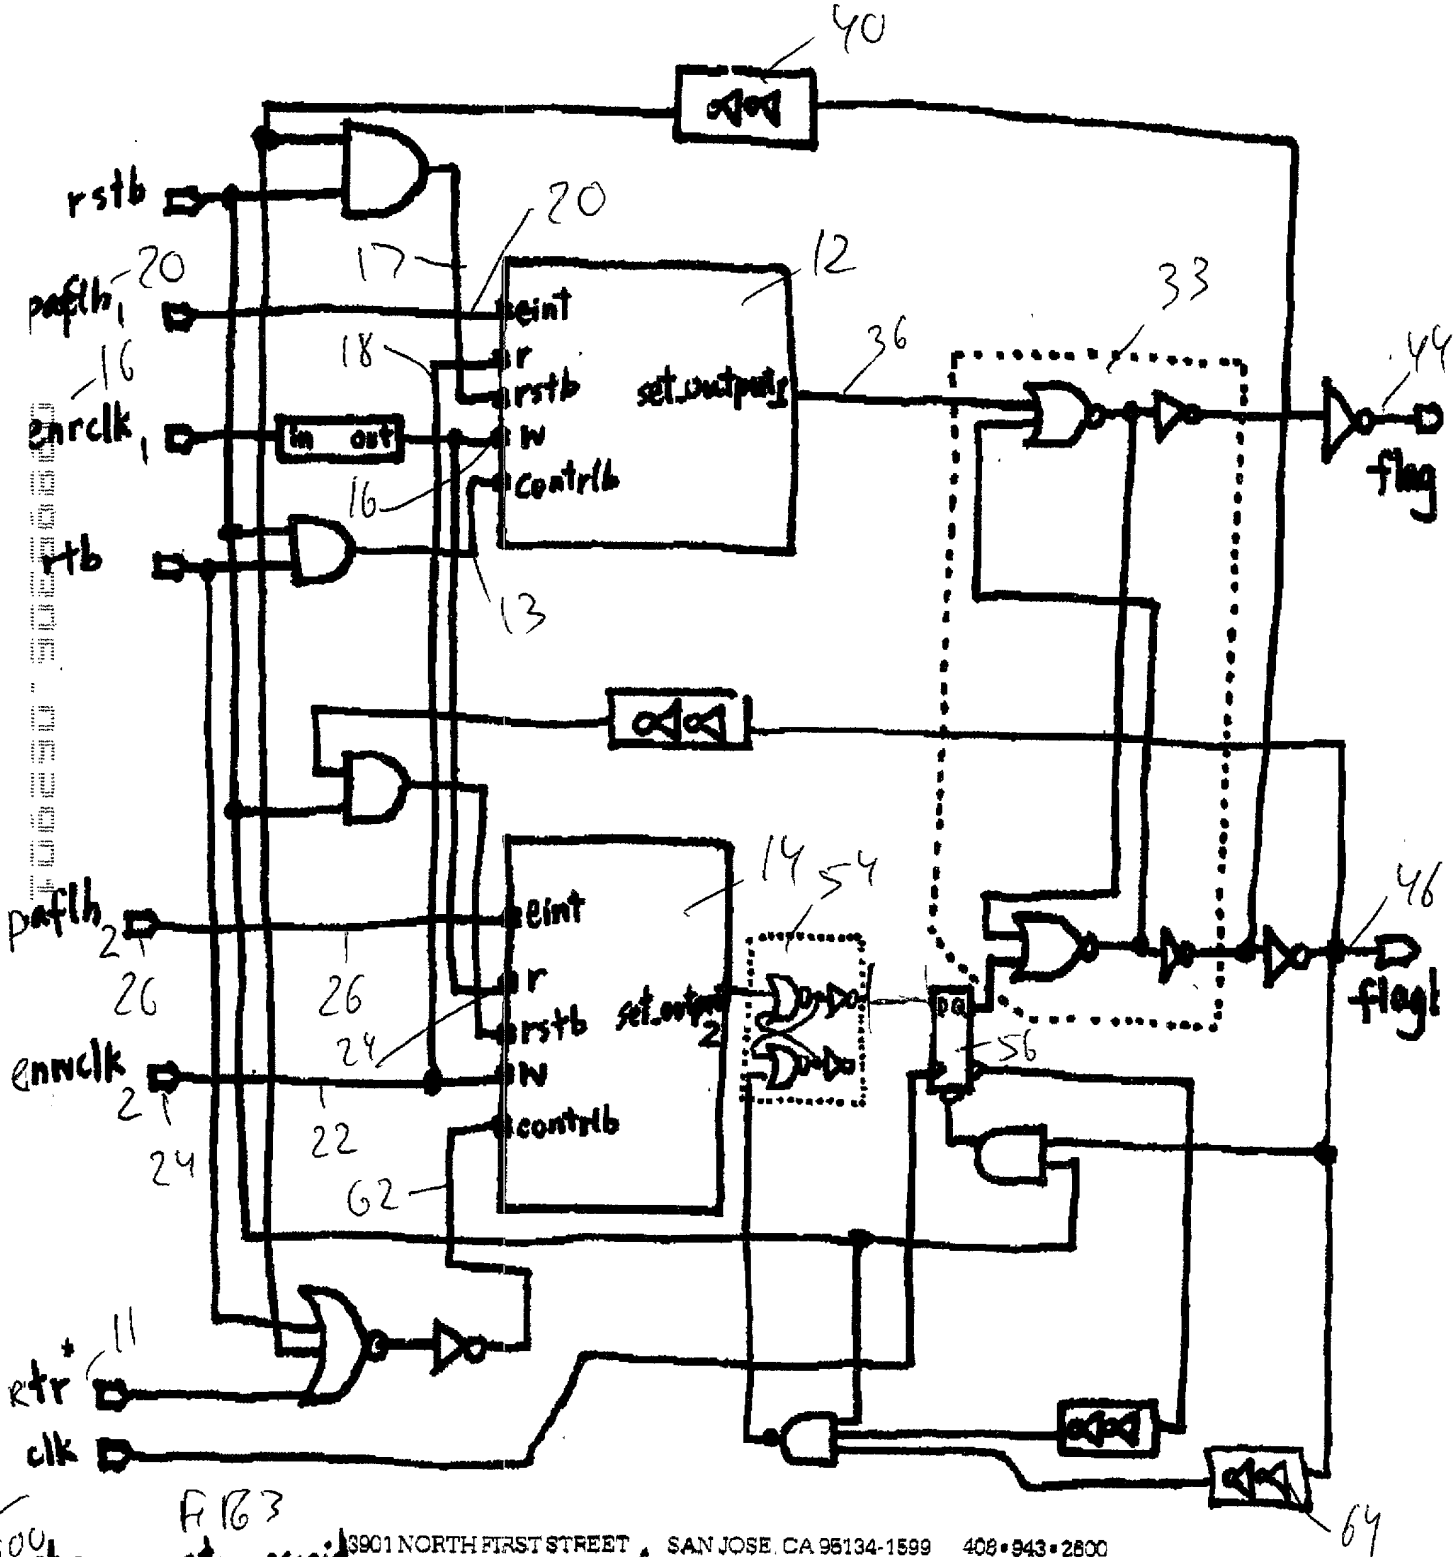

FIG 3

100 rtr — retransmit recovery signal

3901 NORTH FIRST STREET SAN JOSE, CA 95134-1599 408•943•2600

CYPRESS

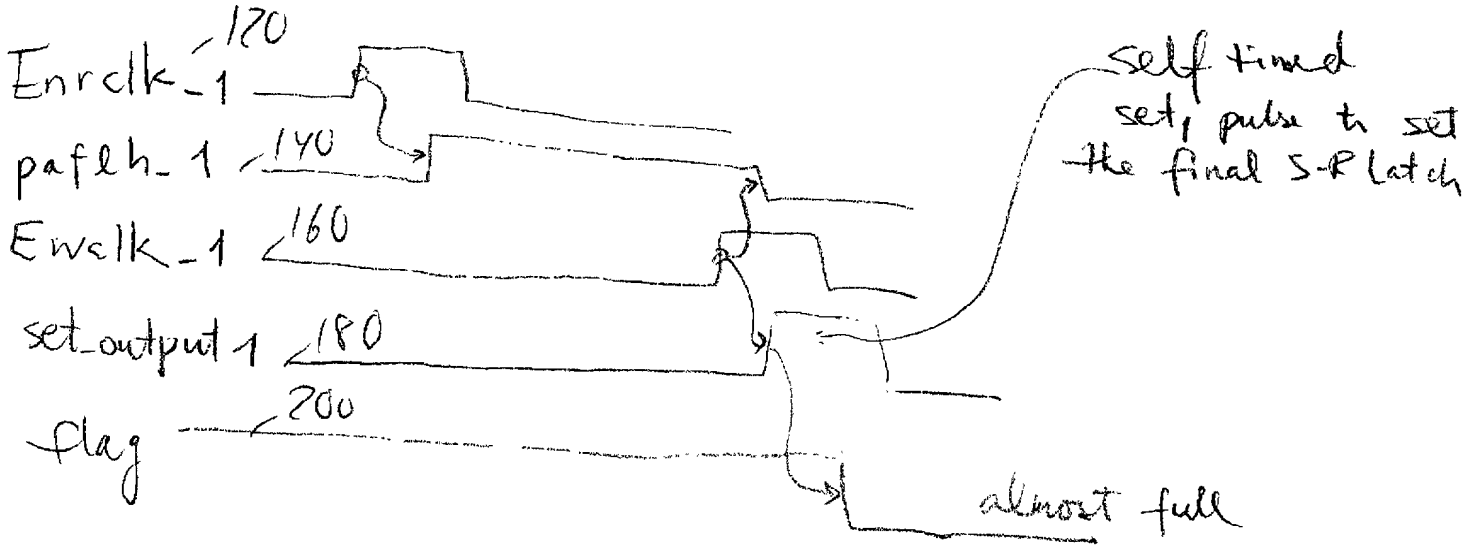

FIG. 4A

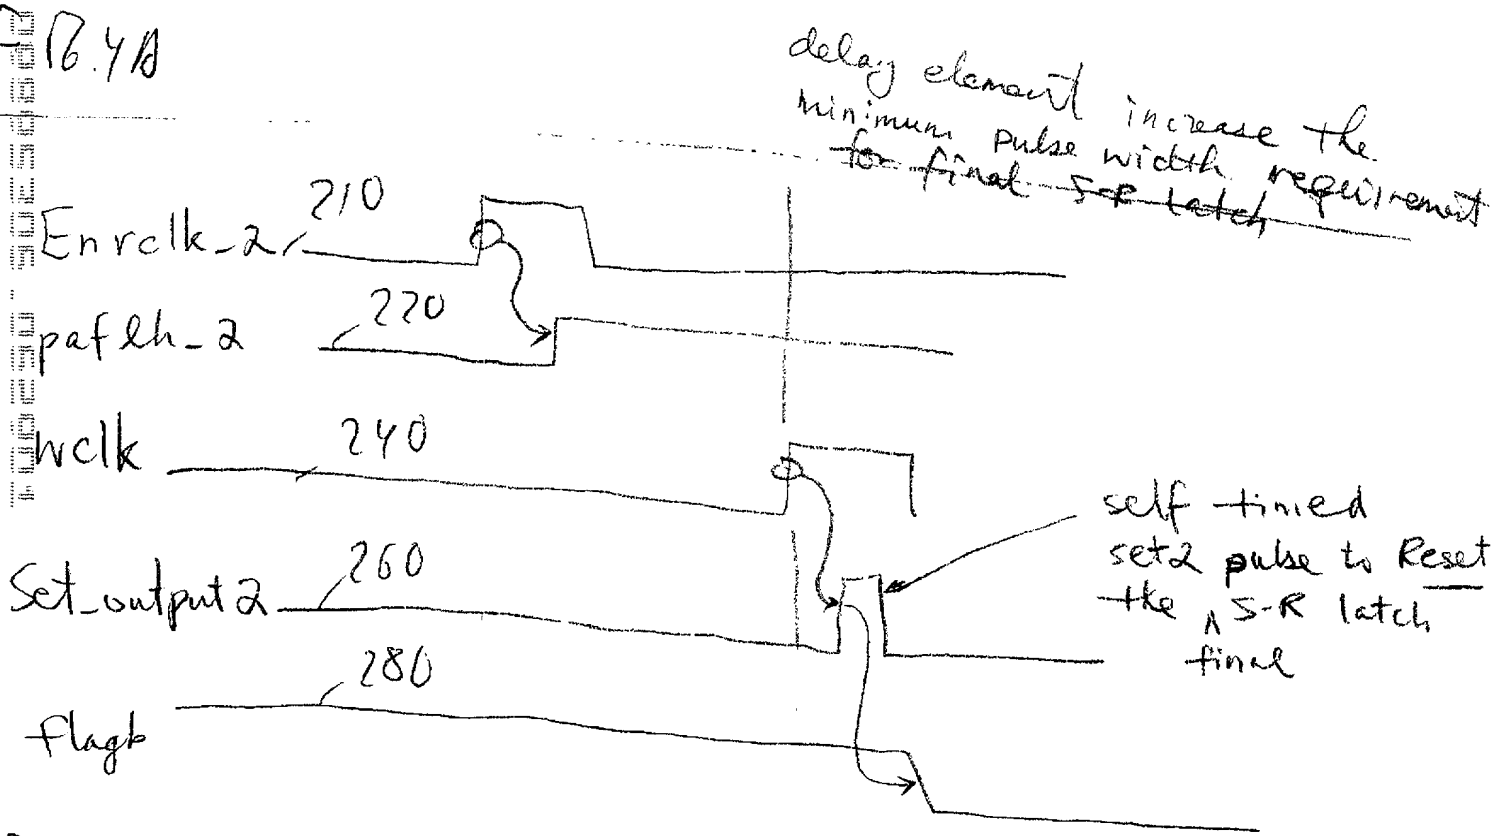

FIG. 4B

PAF

3901 NORTH FIRST STREET SAN JOSE, CA 95134-1599 408 • 943 • 2600

CD01039 / Tank-200

New block diagram

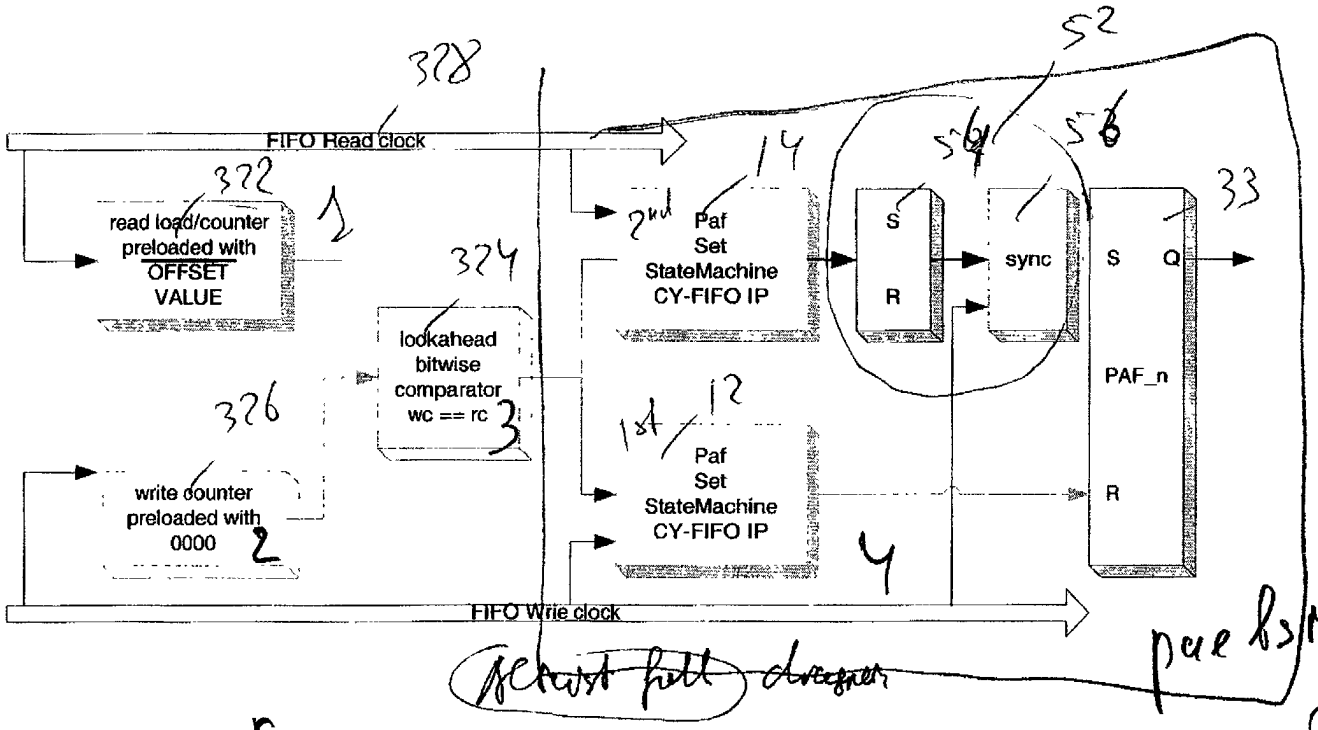

Architecture (Almost Full)

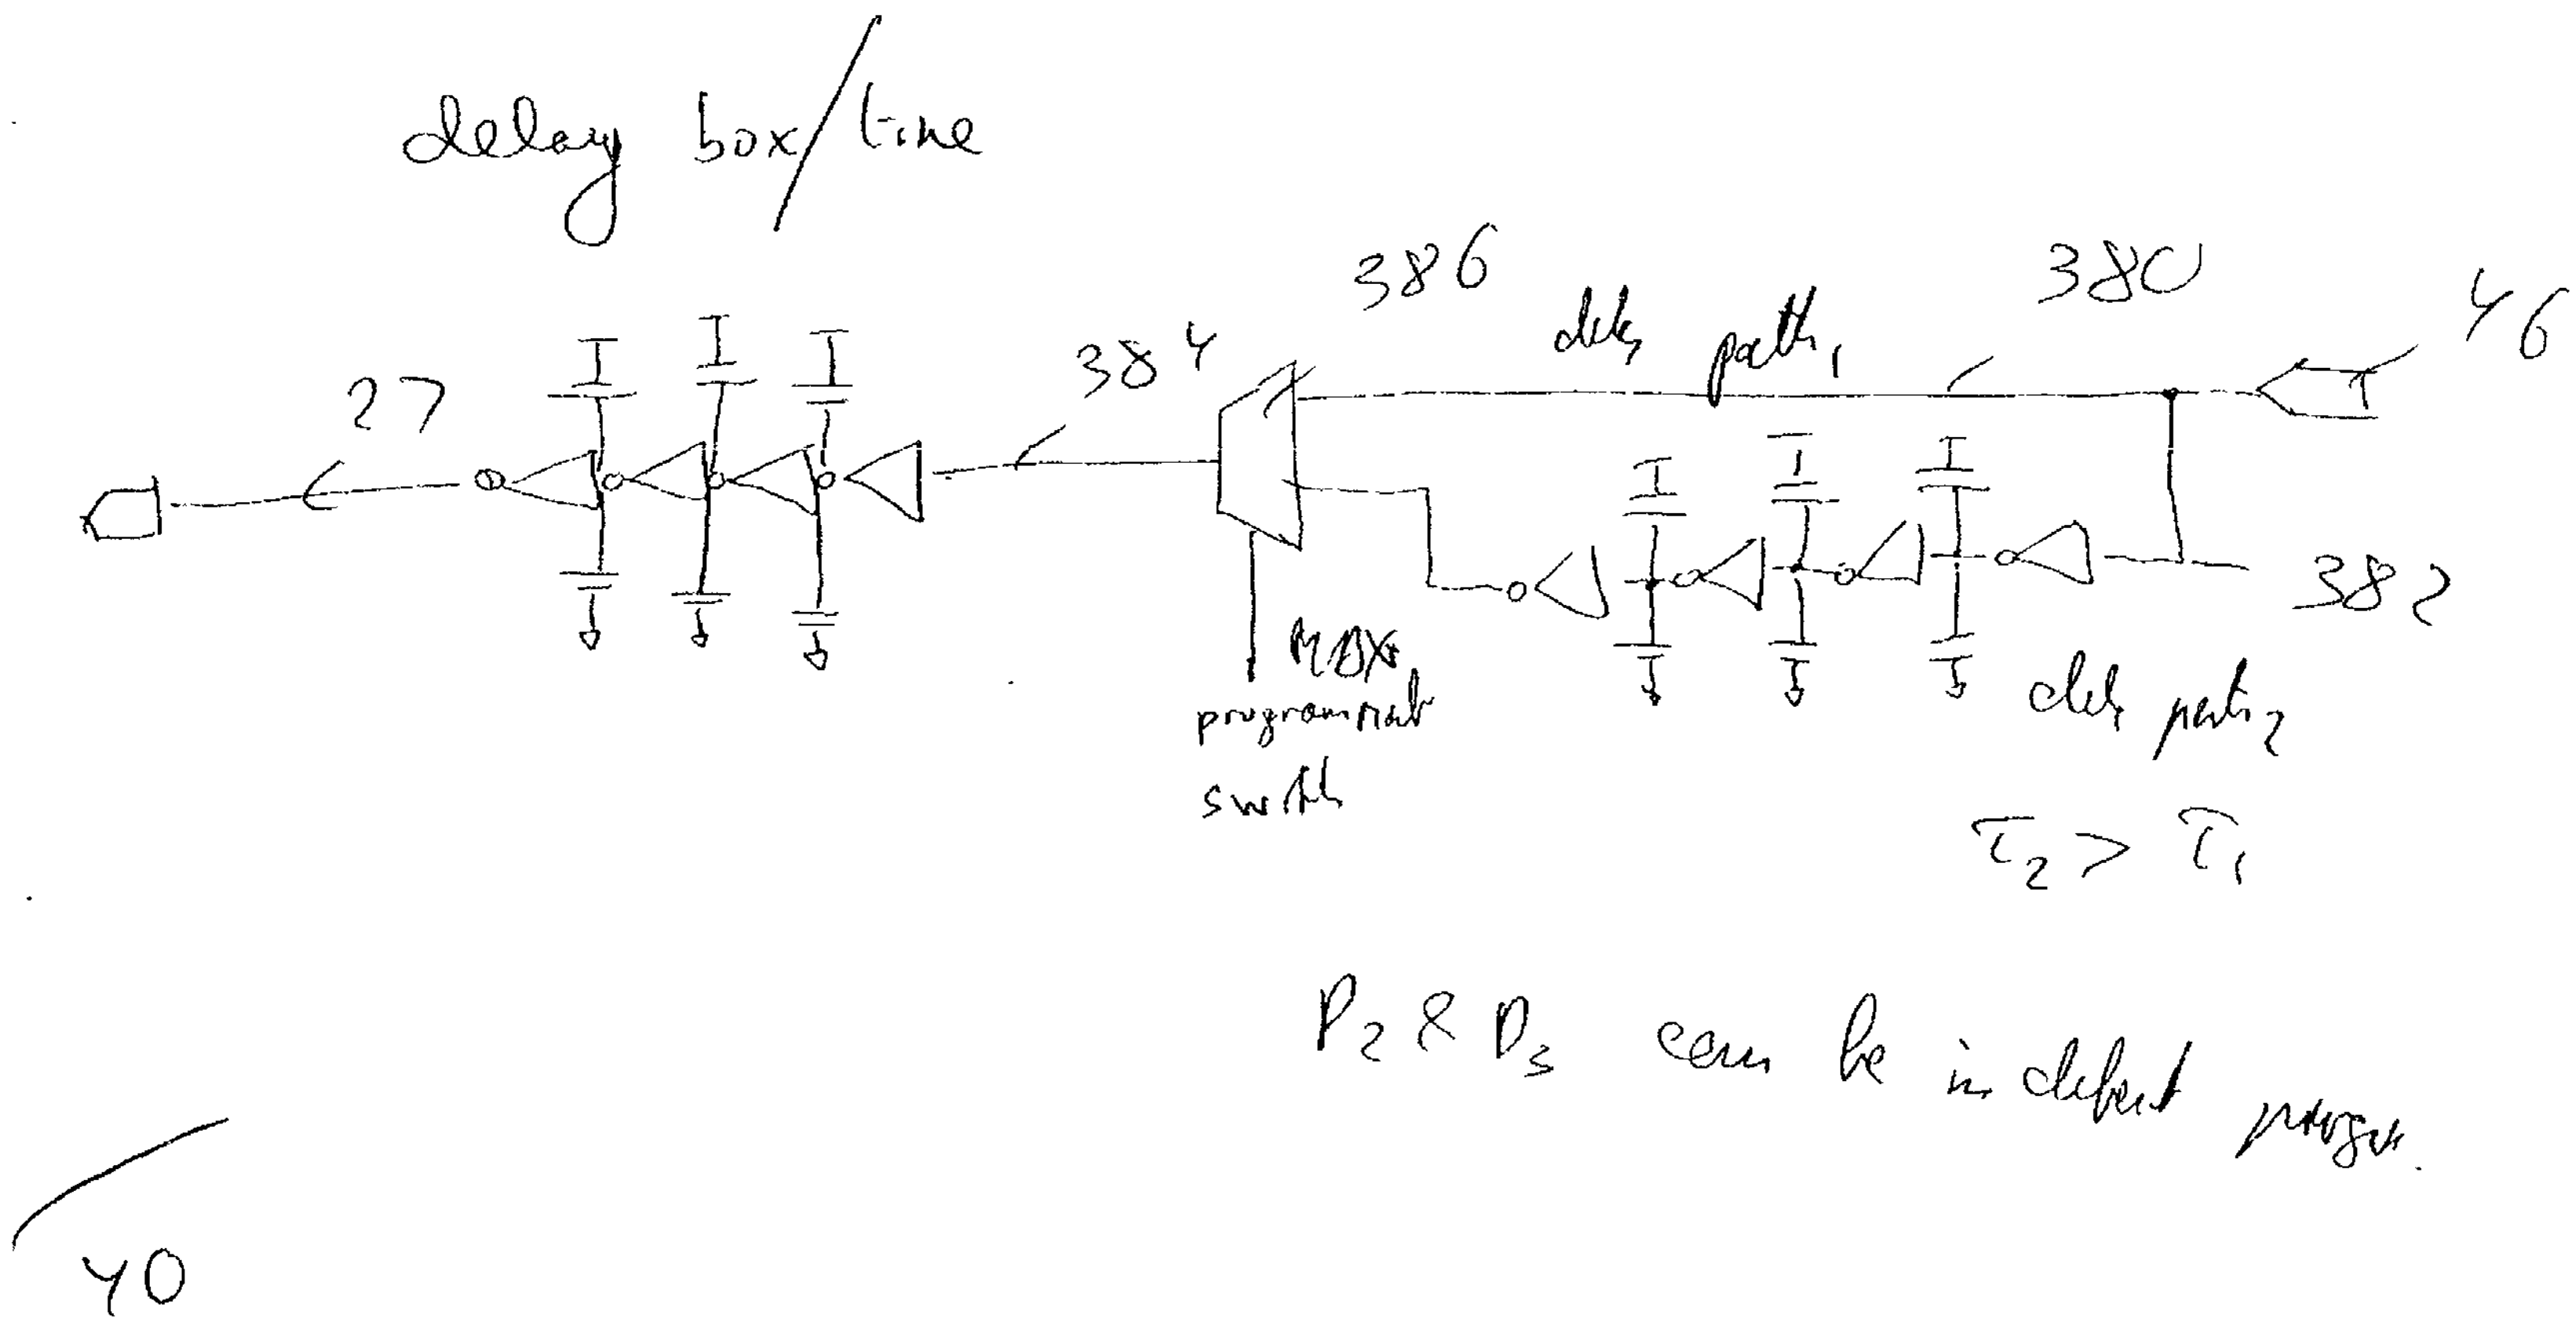

P_2 & D_3 can be in different progs.

FIG. 6

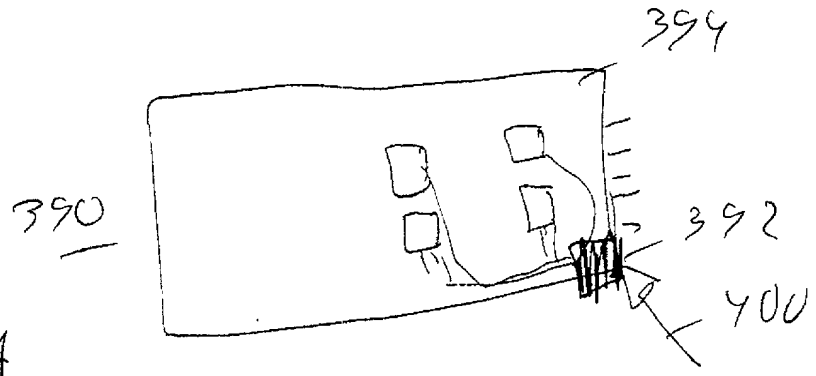

FIG 7A

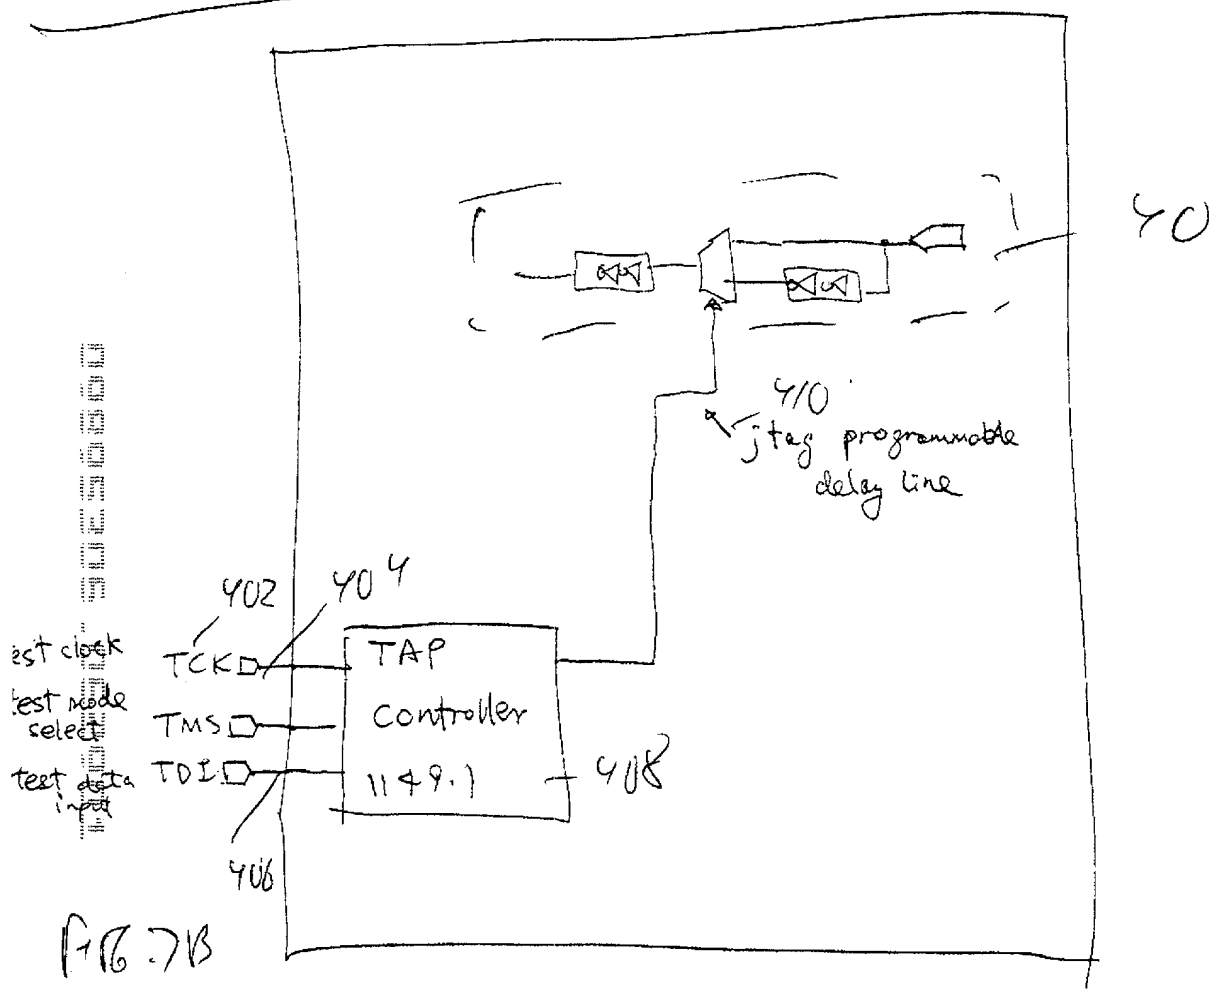

FIG. 7B

Benefits

- use existing jtag standard input pins
- just implement with an additional jtag instruction to program the delay line.